

AC 207

Self Contained Ice Machine 150 kg

Scotsman[®]
Ice Systems

| |
|----------|
| Item |
| Project |
| Quantity |



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.



AC L
Large Gourmet 39 g
Ø 38 mm - H 41 mm



AC M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm

CONDENSING SYSTEM

Water cooled
Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1

| Model | Cube | Ø | H | Weight |
|-------|--------|-------|-------|--------|
| AC L | Large | 38 mm | 41 mm | 39 g |
| AC M | Medium | 30 mm | 34 mm | 20 g |

CERTIFICATIONS



OPERATING REQUIREMENTS

| | Minimum | Maximum |
|--------------------|----------------|----------------|
| Air temperature | 10 | 43 |
| Water temperature | 5 | 38 |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10% | +10% |

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 150 kg


January 2025

AC 207

Self Contained Ice Machine 150 kg

| |
|----------|
| Item |
| Project |
| Quantity |

Self Contained Ice Machine 150 kg

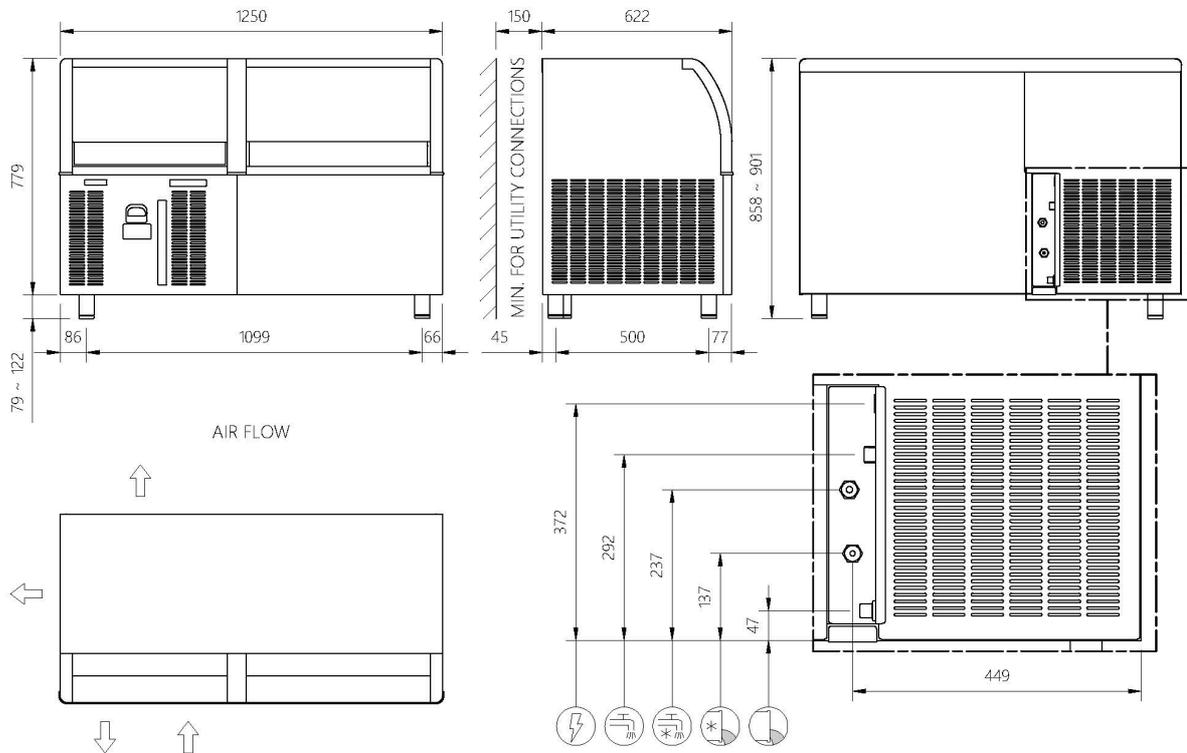

UNIT OF MEASUREMENT: mm

| UNIT DATA | | | SHIPPING DATA | | | | (*) Data refer to 32°C Amb. / 21°C Water temperature conditions | | | | | | |
|----------------------|----------|--------------|---|-----------------|-----------------|------------|---|------------------------------|--------------------|---------------|------------------------|----------------|--|
| Size (W x D x H) | | | Size (W x D x H) | | | | | | | | | | |
| Net weight | | | Gross weight | | | | | | | | | | |
| 1.250 x 620 x 780 mm | | | 1320 x 690 x 960 mm | | | | | | | | | | |
| 82 kg | | | 95kg | | | | | | | | | | |
| | | | 24 h ice production kg C Amb. / °C Water | | | Cap bin | Heat Rejection | Energy Consumption (*) | Water Usage (*) | instant power | circuit wires | Max. Fuse Size | |
| Version | Voltage | Condensation | 10°C/10°C kg | 21°C/10°C kg | 32°C/21°C kg | kg | kW | kWh/ 24h | l/h | W | No. x Ømm ² | A | |
| ACM 207 WS | 230\50\1 | W | 150 | 147 | 135 | 50 | 2,6 | 18 | 151 | 850 | 3 x 1,5 | 10 | |
| ACM 207 AS | 230\50\1 | A | 145 | 150 | 115 | 50 | 2,1 | 22 | 18 | 1.170 | 3 x 1,5 | 10 | |
| ACL 207 AS | 230\50\1 | A | 145 | 150 | 115 | 50 | 2,1 | 22 | 18 | 1.170 | 3 x 1,5 | 10 | |