

MXG 327 xSafeEcoX

Modular Ice Machine 152 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity



FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Electronic control board with self diagnostic and malfunction alarms.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter, removable and washable (air cooled version only).
- Clean alert: advises with a blink when it's time to clean the filter.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



MXG L
Large Gourmet 39 g
Ø 38 mm - H 41 mm



MXG M
Medium Gourmet 20 g
Ø 30 mm - H 34 mm



MXG S
Small Gourmet 8 g
Ø 21 mm - H 25 mm

CONDENSING SYSTEM

Air cooled

RECOMMENDED BIN

BIN

KG

SB193

129

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1

Model	Cube	Ø	H	Weight
MXG L	Large	38 mm	41 mm	39 g
MXG M	Medium	30 mm	34 mm	20 g
MXG S	Small	21 mm	25 mm	8 g

OPERATING REQUIREMENTS

CERTIFICATIONS



	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 152 kg

February 2025


MXG 327 *xSafeEcoX*

Modular Ice Machine 152 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity

Modular Ice Machine 152 kg

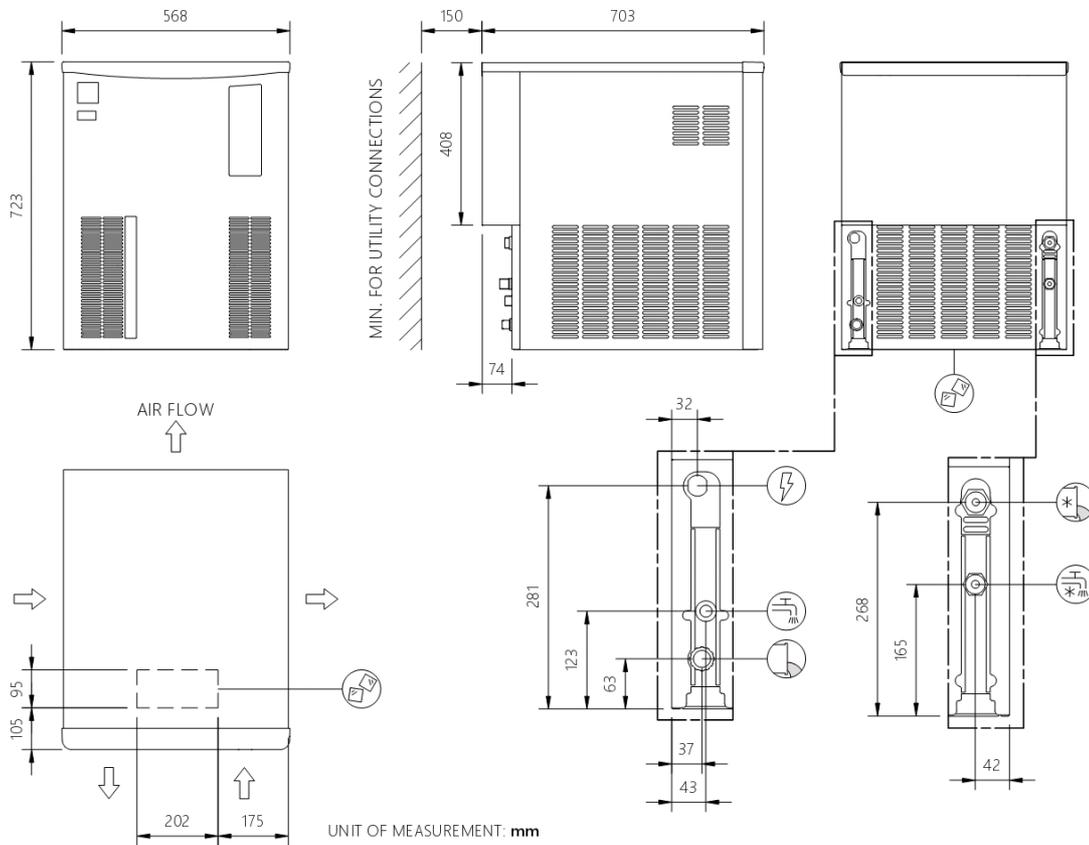

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)		568 x 704 x 721 mm	Size (W x D x H)		630 x 770 x 910 mm							
Net weight		66 kg	Gross weight		77 kg							
			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kW	kWh/ 24h	l/h	W	No. x Ømm ²	A	
MXG M 327 AS	230\50\1	A	152	149	112	2,7	21	13	1.150	3 x 1,5		16
MXG S 327 AS	230\50\1	A	150	147	120	2,1	21	18	1.150	3 x 1,5		10
MXG L 327 AS	230\50\1	A	140	137	110	2,1	21	12	1.150	3 x 1,5		16