

MF 37 xSafeEcoX

Modular Ice Machine 215 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity



FEATURES

- Produces Flake Ice, extruded at a temperature just below 0°C, with 25% residual water content, hence very rich in moisture.
- Resistant stainless steel exterior.
- AISI304 Stainless steel evaporator and ice scraper blade.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Electronic control board with self diagnostic and malfunction alarms.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.

CONDENSING SYSTEM

Water cooled
Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1

RECOMMENDED BIN

BIN

KG

SB193

129



CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 215 kg

March 2025


MF 37 *xSafeEcoX*

Modular Ice Machine 215 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity

Modular Ice Machine 215 kg

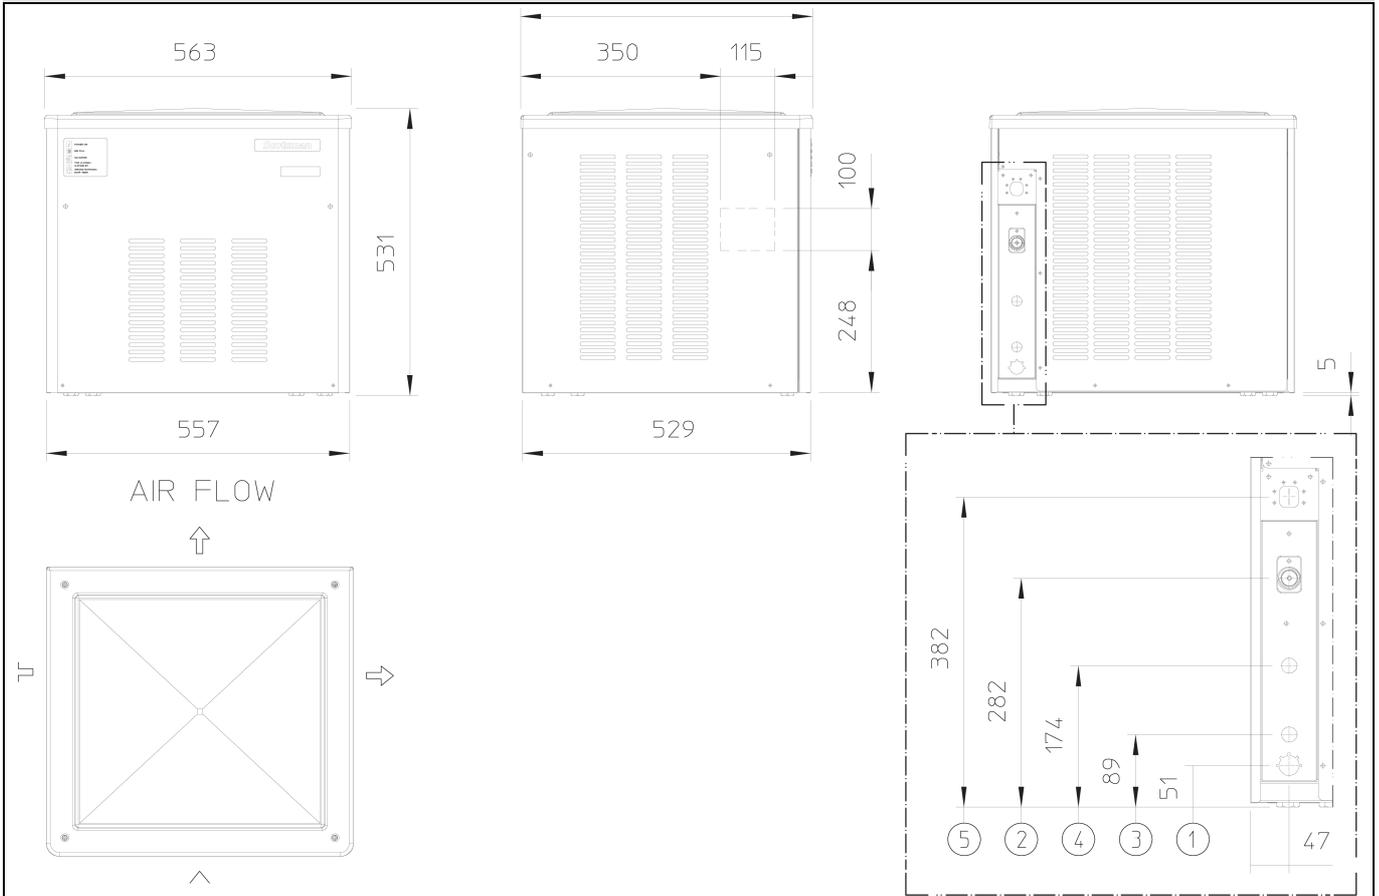

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)		560 x 533 x 525 mm	Size (W x D x H)		680 x 610 x 630 mm							
Net weight		52 kg	Gross weight		55kg							
			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kW	kWh/24h	l/h	W	No. x Ømm2	A	
MF 37 WS OX	230\50\1	W	215	210	185	1,5	14	59	580	3 x 1,5	10	
MF 37 AS OX	230\50\1	A	200	199	170	1,5	15	7	695	3 x 1,5	10	

Milano

Madrid

Chicago

Dubai

Singapore

Shanghai

Johannesburg